

ENVIRONMENTAL PRODUCT DECLARATION

FACTORY OF USG MIDDLE EAST SONATA & SONATA HEALTHCARE

ClimaPlus Performance



Factory of USG Middle East LTD. Co.

7410 (Wasil) Street #23, Cross 76 (Right) 2nd
Industrial City, Dammam 34326-4201 Kingdom of
Saudi Arabia

t +966 13 812 0995

f +966 13 812 1029

C.R. 2050014850

www.usgme.com

info@usgme.com



Sustainable practices have naturally been an inherent part of our business at Factory of USG Middle East. They help shape the innovative products that become the homes where we live, the buildings where we work and the arenas where we play.

From the product formulations we choose, to the processes we employ, Factory of USG Middle East is committed to designing, manufacturing, and distributing products that minimize overall environmental impacts and contribute toward a healthier living space.

We believe that transparency of product information is essential to our stakeholders and EPDs are the next step toward an even more transparent Factory of USG Middle East.

USG ME's ceiling panels listed in this UL Environment Certified Document provides an acoustical ceiling panel's: Life Cycle Assessment (LCA), LCA Impact Measures, Product Composition, Material Definitions, Manufacturing Process, Product Performance Attributes and Product Application.



ENVIRONMENTAL PRODUCT DECLARATION





USG ME
Sonata and Sonata Healthcare Acoustical Ceiling Panels

According to ISO 14025, ISO 21930:2007 and EN 15804

This declaration is an environmental product declaration (EPD) in accordance with ISO 14025. EPDs rely on Life Cycle Assessment (LCA) to provide information on a number of environmental impacts of products over their life cycle. Exclusions: EPDs do not indicate that any environmental or social performance benchmarks are met, and there may be impacts that they do not encompass. LCAs do not typically address the site-specific environmental impacts of raw material extraction, nor are they meant to assess human health toxicity. EPDs can complement but cannot replace tools and certifications that are designed to address these impacts and/or set performance thresholds – e.g. Type 1 certifications, health assessments and declarations, environmental impact assessments, etc. Accuracy of Results: EPDs regularly rely on estimations of impacts, and the level of accuracy in estimation of effect differs for any particular product line and reported impact. Comparability: EPDs are not comparative assertions and are either not comparable or have limited comparability when they cover different life cycle stages, are based on different product category rules or are missing relevant environmental impacts. EPDs from different programs may not be comparable.



PROGRAM OPERATOR	UL Environment	
DECLARATION HOLDER	USG Middle East LTD CO	
DECLARATION NUMBER	4787281571.101	
DECLARED PRODUCT	USG ME Sonata & Sonata Healthcare Acoustical Ceiling Panels	
REFERENCE PCR	UL Part B: Non-Metal Ceiling Panel, v.1.0 October 2015 & UL Part A, v.1.3 2014	
DATE OF ISSUE	July 1, 2020	
PERIOD OF VALIDITY	5 Years	
CONTENTS OF THE DECLARATION	Product definition and information about building physics Information about basic material and the material's origin Description of the product's manufacture Indication of product processing Information about the in-use conditions Life cycle assessment results Testing results and verifications	
The PCR review was conducted by:	UL Environment	
	PCR Review Panel	
	epd@ulenvironment.com	
This declaration was independently verified in accordance with ISO 14025 by Underwriters Laboratories. <input type="checkbox"/> INTERNAL <input checked="" type="checkbox"/> EXTERNAL	 Grant R. Martin, UL Environment	
	 James Mellentine, Ramboll	
This life cycle assessment was independently verified in accordance with ISO 14044 and the reference PCR by:		

This EPD conforms with ISO 21930:2007 and EN 15804:2012

ENVIRONMENTAL PRODUCT DECLARATION

USG ME
Sonata and Sonata Healthcare Acoustical Ceiling Panels



According to ISO 14025

1. General Information

This EPD document is for Sonata and Sonata Healthcare manufactured by Factory of USG Middle East where the manufacturing plant located in Dammam, Kingdom of Saudi Arabia.

2. Product System Documentation

2.1. Product Description

Sonata and Sonata Healthcare Acoustical Ceiling Panels are designed to offer the highest standard in noise reduction (NRC) or noise isolation (CAC). Fine textured and mold resistant, they offer superior sag resistant and high light reflectance values. Their durability, performance and attractiveness make them ideal choice for a best visual and balanced acoustic performance solution on the Ceiling Market.



Sonata and Sonata Healthcare



ENVIRONMENTAL PRODUCT DECLARATION

USG ME
Sonata and Sonata Healthcare Acoustical Ceiling Panels



According to ISO 14025

2.2. Application

Sonata and Sonata Healthcare can be used in many areas and not limited to: executive offices and conference rooms, reception areas and lobbies, classrooms, corridors, restaurants entertainment and gaming centers and nurseries. Sonata Healthcare is ISO 4 according to the norm ISO 14644-1 for use in hospitals restricted and semi restricted areas such as Class 1 MRI & Imaging Rooms, Corridors, Patient Rooms, Nurses Stations, Laboratories, Pharmacies and Food Storage. Sonata and Sonata Healthcare are classified as low-emitting ceiling panel which is ideal for general use buildings, offices, schools, corridors and healthcare.

Sonata and Sonata Healthcare are available in concealed edge details to increase the area aesthetics. USG ME produces Sonata and Sonata Healthcare in metric and imperial sizes to fit all construction types and to match the contractors lighting fixtures demand.

2.3. Technical Data

Technical information and product standards are given in the table below.

Name	Sonata & Sonata Healthcare (Value/Unit)
Noise Reduction Coefficient (NRC) Test Method C423	0.75
Ceiling Attenuation Class (CAC) Test Method ASTM E1414 & ASTM E413	37 dB
Surface Burning Characteristics Test Method ASTM E84	Class A, Flame Spread of 20 or less, smoke developed of 70 or less
Fire Rating Test Method ASTM E119	2hrs Time-Rated Assembly [J201]
Light Reflectance Test Method ASTM E1477	0.89
Thermal Transmission Test Method ASTM C518	0.31 m ² °K/W - R 1.8
Humidity Resistance Test Method ASTM C367/C367M	Max. 99% RH / 40°C

Sonata and Sonata Healthcare are being produced with the most stringent manufacturing facility of its type in the MENA region, the company has ISO 9001:2015 certificate and ISO 14001:2015 certificate. Sonata and Sonata Healthcare are GREENGUARD gold certified product with very low VOC emission level as per UL 2818 - 2013 Gold Standard for Chemical Emissions for Building Materials, Finishes and Furnishings. Certificate reference is 83794-420 for Sonata and 83803-420 for Sonata Healthcare.



ENVIRONMENTAL PRODUCT DECLARATION

USG ME
Sonata and Sonata Healthcare Acoustical Ceiling Panels



According to ISO 14025

2.4. Placing On The Market / Application Rules

The respective standard and general technical approval for these products are indicated above. Further detail may be found on the www.usgme.com website.

2.5. Delivery Status

The products under consideration are typically delivered in bundles surrounded by a cardboard sleeve and wrapped with plastic.

2.6. Base Materials / Ancillary Materials

Sonata and Sonata Healthcare are produced with Wet Forming process consisting of a latex / Starch-bound mineral wool basemat laminated with a non-woven veil. The base materials as mass percentage per unit are shown in the table below.

Base Materials	Sonata & Sonata Healthcare Mass Percentage
Mineral Wool	< 70%
Perlite	< 5%
Corn Starch	< 11%
Waste Paper	< 3%
China Clay Grade "E"	< 3%
Coating	< 12%
Adhesive	< 3%

2.7. Manufacture

In wet felted production, the panel ingredients are mixed into a slurry, filtered and then distributed onto a moving wire fabric, dewatered using gravity and vacuum drainage and formed into a dewatered basemat. The dewatered basemat is then pressed and dried. The dried panels are laminated, cut or trimmed into the appropriate sizes and painted. Painting may involve two or more coatings with a drying cycle between coatings. After inspection, the ceiling panel are packaged for shipment. Panel trim and panels that are chipped or broken during manufacturing (referred to as "broke") are recycled and returned to the process. USG ME produce its own paint coatings and the primary ingredients for these coatings are also included in the analysis. The finishing unit processes are dominated by the use of water-based paint, which contains ingredients such as Calcium Carbonate, clay, latex, Titanium Dioxide (TiO₂) and other chemicals. Shrink-wrap and corrugated Strip are used as packing materials.



ENVIRONMENTAL PRODUCT DECLARATION

USG ME
Sonata and Sonata Healthcare Acoustical Ceiling Panels



According to ISO 14025

Manufacturing flow chart is given in the figure below.



2.8. Environment and Health During Manufacturing

All appropriate equipment required by federal, state and local regulations are in place at all USG ME manufacturing facilities.

2.9. Product Processing / Installation

The ceiling panels must be installed in accordance with all applicable USG ME installation guidelines. Approved installation procedures are provided in the Ceiling Systems Catalogs must be followed. Installation of USG ME's ceiling and grid products is accomplished by manual labor using mostly hand tools. No material or energy inputs are required on the jobsite

2.10. Packaging

USG ME ceiling panels are packaged using cardboard sleeves and are then wrapped in plastic shrink wrap. USG ME encourages the proper recycling of these packaging materials. Both the production and disposal of these packaging materials was modeled in this LCA study.

2.11. Condition of Use

To insure the longevity of the product, panels should not be exposed to moisture, high relative humidity or high temperature. Criteria can be found in the USG ME Warranties and Limitations information specific for each product.



ENVIRONMENTAL PRODUCT DECLARATION

USG ME
Sonata and Sonata Healthcare Acoustical Ceiling Panels



According to ISO 14025

2.12. Environment and Health During Use

This product is not expected to produce any unusual hazards during normal use. Exposure to high dust levels may irritate the skin, eyes, nose, throat or upper respiratory tract. Proper personal protective gear should be worn by installer for protection. The installed ceiling panel is GREENGUARD Gold Certified products for low chemical emissions.

2.13. Reference Service Life

A default RSL of 75 years shall be assumed for the product and ceiling panel mounting system. An assumed Estimated Service Life (ESL) of 75 years shall be used for building life.

2.14. Extraordinary Effects

Fire

All ceiling products covered by this study are certified to be Class A (flame spread of 25 or less, smoke developed of 50 or less per ASTM C84).

Water

Moisture must not come in contact with the ceiling panel as a result of a leaking roof, a sweating pipe, a leaking radiator, a flood, condensation on more subtle surfaces where dew points are reached, humidified air from the HVAC system or any other similar causes.

Mechanical Destruction

The product must be installed and maintained in accordance with current USG written instructions and best industry practice, including the CISCA Handbook and ASTM C636, "Standard Practice for Installation of Metal Ceiling Suspension System for Acoustical Tile and Lay-In Panels.

2.15. Re-use Phase

With proper care, USG ME ceiling panels may be reused at the end of a building's life.

2.16. Disposal

This EPD covers product stage modules A1, A2, A3 and does not cover end of life stage. In normal practice, most grid components are recycled at end-of-life while all ceiling panel waste generated during installation and at end-of-life is assumed to be disposed of in an appropriate landfill.

2.17. Further Information

For further information, please visit www.usgme.com.



ENVIRONMENTAL PRODUCT DECLARATION

USG ME
Sonata and Sonata Healthcare Acoustical Ceiling Panels



According to ISO 14025

3. LCA Calculation Rules

The LCA study and analysis were conducted according to the PCR “UL - Part B: Non-Metal Ceiling Panel EPD Requirements October 2015 v1” in accordance with ISO 14040 and ISO 14044.

Product stage including the modules A1 (raw material supply), A2 (transport), A3 (manufacturing) is considered as life cycle stage.

3.1. Declared and Functional Unit

The declared unit is 1m² of the product ‘USG ME Sonata and Sonata Healthcare’. Please see the table below for declared unit, declared thickness and surface weight per declared unit.

Name	Sonata & Sonata HC
	Value/Unit
Declared unit	1 m ²
Declared thickness	19 mm
Surface weight per declared unit	5.00 kg/m ²

3.2. System Boundary

The scope of study includes the product stage ‘cradle to gate’. Product stage includes the modules A1 (raw material supply), A2 (transport), A3 (manufacturing). Extraction and delivery of base materials and packaging materials, emissions to air, water and soil during manufacturing are included in the LCA study. Construction of capital equipment, maintenance and operation of support equipment, human labor and employee commute, overhead of manufacturing facilities and internal transportation are excluded.

3.3. Estimates and Assumptions

LCA study of USG ME’s non-metal ceiling tile ‘Sonata and Sonata Healthcare’ is conducted in accordance with all methodological considerations such as performance, system boundaries, data quality, allocation procedures and decision rules to evaluate inputs and outputs.

Since all the data used in this study except moisture contents of the raw materials are already provided by the manufacturer, there is no data gaps which should be filled by estimates and conservative assumptions with average or generic data. The only estimated values used within this study are the moisture contents of the raw materials.



3.4. Cut-off Criteria

All inputs and outputs to unit processes for which data available are included in the calculation. The life cycle is covered from cradle to gate, including all industrial processes from raw material acquisition, pre-processing and production. The LCA study includes the provision of all materials, transportation, energy and emission flows.

There is no neglected unit process more than 1% of total mass and energy flows. The total neglected input and output flows do also not exceed 5% of energy usage or mass as indicated in the PCR.

The production of capital goods, paint used on packaging cardboards, infrastructure, carrying of product to the storage in manufacturing site, production of manufacturing equipment and personnel-related activities are not included in the LCA study as indicated in the PCR.

3.5. Background Data

The LCA model of 1m² of USG ME non-metal ceiling tile 'Sonata and Sonata Healthcare' has been created by using GaBi DB Version 6.115 software system for life cycle engineering by ERKE Sustainable Building Design and Consultancy Ltd.

In this assessment, all modelling calculations are based on the amounts declared by manufacturer.

The primary data collection is accomplished in the form of spreadsheet and questionnaires, and supplemented by manufacturer communication. All relevant background data necessary for the materials used in the model are included in the GaBi database.

3.6. Data Quality

For consistency and completeness of data, GaBi 6 Software-System and Databases for Life Cycle Engineering DB Version 6.115 are used. It provides the life cycle inventory database in all branches to assess the potential environmental burdens of a product from cradle to gate. All input and output flows, type of materials used, energy consumption, transportation and wastes are primary data taken from the manufacturer.

All the primary data required for LCA Analysis are in the time period between 29.10.2018 and 25.10.2019 for 12 consecutive months. Datasets used in GaBi for calculation are attempted to select last 5 years.

The specific data quality coverages are also;

- Geographical coverage: The study partially complies with the actual manufacturing situation in Middle East.
- Time period coverage: The goal of the study is to determine the actual environmental loads for 12 consecutive months, therefore the data for 29.10.2018-25.10.2019 period are used.
- Technology coverage: The objective of the study is to use data that apply to average technology which represents actual situation. Data available for these processes in GaBi are expected to show limited global variability.

ENVIRONMENTAL PRODUCT DECLARATION

USG ME
Sonata and Sonata Healthcare Acoustical Ceiling Panels



According to ISO 14025

The data quality is assessed based on Table 8.2 of WRI Product Standard. The declaration of raw material inputs and outputs are collected on site by weighting each material type, therefore “Very Good” is assigned for raw material supply and manufacturing stages. Since the manufacturer has sufficient data for the stage transportation, the data quality is determined as “Good”.

Since there is no specific data for Saudi Arabia in GaBi, European data are mostly preferred as they are the average of various countries. European data for raw materials, haulage vehicles, diesel used for transportation, electricity and water resources and wastewater are used as a substitute for Saudi Arabia’s specific data. Using European data does not cause significant differences in the LCA results, because, the processes used are common around the world since the technologies used are similar.

Different LCA software and background LCI datasets may lead to different results for life cycle stages. Therefore, without understanding the specific variability, the user is not encouraged to compare the LCA results. Even for similar products, data quality may produce incomparable results. Moreover, LCIA results are relative statements and do not anticipate category endpoints, exceeding thresholds, safety margins, or effects on risks.

3.7. Period Under Review

All raw material and energy inputs are for the time period between 29.10.2018 and 25.10.2019.

3.8. Allocation

The allocation is performed in which the product output fixed to 1 m² and the corresponding amount of product is used in the calculations.

Average values for 1m² of the product which is used within this study is calculated by considering the total product weight per annual production. According to this, the total energy, water, and packaging materials used during production and the waste water generated are divided by the total annual production. Since the formulation of each product is certain, base materials do not need to be allocated. The damaged end products which are shredded and put into production again are calculated by scaling the annual casualties to the annual production. Accordingly, since there is no waste during the production phase, waste allocation is not applicable.

In the factory, several kinds of non-metal ceiling panels are produced. Since the production processes of these products are similar, the annual production percentages are taken into consideration to allocate water and energy consumption. Additionally, since the energy used in dryer is different for each product, the energy consumption of oven is monitored separately and allocated for each product.

3.9. Comparability

A comparison or evaluation of EPD data is only possible if all data sets to be compared are 1) created according to EN 15804 and 2) are considered in a whole building context or utilize identical defined use stage scenarios. Comparisons are only allowable when EPDs report cradle-to-grave information using a functional unit. Refer to section 5.3 of EN 15804 for further information.



ENVIRONMENTAL PRODUCT DECLARATION

USG ME
Sonata and Sonata Healthcare Acoustical Ceiling Panels



According to ISO 14025

4. LCA: Results

For the results of life cycle assessment according to relevant PCR, the following life cycle stages and information modules are considered;

- **Module A1 Raw material supply:** This stage covers the extraction of the base materials.
- **Module A2 Transport:** This stage covers the delivery of the base materials, ancillary materials and packaging materials.
- **Module A3 Manufacturing:** This stage includes the production processes of the final product in the factory as gate to gate processes. Energy and water consumption and waste generation are accounted in this stage.

DESCRIPTION OF THE SYSTEM BOUNDARY (X = INCLUDED IN LCA; MND = MODULE NOT DECLARED)																
PRODUCT STAGE			CONSTRUCTION PROCESS STAGE		USE STAGE							END OF LIFE STAGE				BENEFITS AND LOADS BEYOND THE SYSTEM BOUNDARIES
Raw material supply	Transport	Manufacturing	Transport from gate to site	Assembly / Install	Use	Maintenance	Repair	Replacement	Refurbishment	Operational Energy Use	Operational Water Use	Deconstruction	Transport	Waste processing	Disposal	
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
X	X	X	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND



ENVIRONMENTAL PRODUCT DECLARATION

USG ME
Sonata and Sonata Healthcare Acoustical Ceiling Panels



According to ISO 14025

USG ME 1m² SONATA & SONATA HEALTHCARE
North American LCA Environmental Impact Results
Method: TRACI 2.1 Impact Assessment, October 2013

The following table and bar-chart exhibit quantities and relative contributions (%) from life cycle stages of 1m² Sonata and Sonata Healthcare to total Global warming potential (GWP), Stratospheric ozone layer depletion potential (ODP), Acidification potential (AP), Eutrophication potentials (EP), Photochemical ozone creation potential (POCP), Abiotic resource depletion potential – fossil fuels (ADP) for North America according to the method TRACI 2.1 Impact Assessment, October 2013.

North American LCA Environmental Impact Results Method: TRACI 2.1 Impact Assessment, October 2013			PRODUCT STAGE		
			A1	A2	A3
Parameter		Unit	Raw material supply	Transport	Manufacturing
GWP	Global warming potential	[kg CO ₂ Eq.]	1.38E+01	2.73E+00	6.07E-02
ODP	Stratospheric ozone layer depletion potential	[kg CFC-11 Eq.]	3.08E-07	1.24E-11	1.77E-11
AP	Acidification potential	[kg SO ₂ Eq.]	1.09E-01	6.96E-02	1.71E-04
EP	Eutrophication potentials	[kg N Eq.]	3.79E-03	2.42E-03	4.28E-05
POCP	Photochemical ozone creation potential	[kg O ₃ Eq.]	7.06E-01	1.28E+00	2.82E-03
ADP	Abiotic resource depletion potential – fossil fuels	[MJ, LHV]	1.74E+01	4.90E+00	9.62E+00



ENVIRONMENTAL PRODUCT DECLARATION

USG ME
Sonata and Sonata Healthcare Acoustical Ceiling Panels



According to ISO 14025

USG ME 1m² SONATA & SONATA HEALTHCARE
EU and ROW Life Cycle Environmental Impact Results
Method: CML 4.1 Impact Assessment (per EN 15804:2012 + A1:2013)

The following table and bar-chart exhibit quantities and relative contributions (%) from life cycle stages of 1m² Sonata and Sonata Healthcare to total Global warming potential (GWP), Depletion potential of the stratospheric ozone layer (ODP), Acidification potentials for air emissions (AP Air), Eutrophication potentials (EP), Formation potential of tropospheric ozone (POCP), Abiotic depletion potential for non-fossil resources (ADP elements), Abiotic depletion potential for fossil resources (ADP fossil fuels) for Europe and rest of the world according to the method CML 4.1 Impact Assessment (per EN 15804:2012 + A1:2013).

EU and ROW Life Cycle Environmental Impact Results Method: CML 4.1 Impact Assessment (per EN 15804:2012 + A1:2013)			PRODUCT STAGE		
			A1	A2	A3
Parameter		Unit	Raw material supply	Transport	Manufacturing
GWP	Global warming potential	[kg CO ₂ Eq.]	1.38E+01	2.73E+00	6.07E-02
ODP	Depletion potential of the stratospheric ozone layer	[kg CFC-11 Eq.]	2.83E-07	1.17E-11	1.66E-11
AP Air	Acidification potentials for air emissions	[kg SO ₂ Eq.]	9.88E-02	6.58E-02	1.45E-04
EP	Eutrophication potentials	[kg (PO ₄) ³⁻ Eq.]	1.04E-02	6.86E-03	3.30E-05
POCP	Formation potential of tropospheric ozone	[kg ethane Eq.]	8.33E-03	3.46E-03	1.27E-05
ADP elements	Abiotic depletion potential for non-fossil resources	[kg Sb Eq.]	8.55E-06	9.92E-08	5.38E-07
ADP fossil fuels	Abiotic depletion potential for fossil resources	[MJ, LHV]	1.83E+02	3.41E+01	6.45E+01



ENVIRONMENTAL PRODUCT DECLARATION

USG ME
Sonata and Sonata Healthcare Acoustical Ceiling Panels



According to ISO 14025

USG ME 1m² SONATA & SONATA HEALTHCARE LCA Results: Resource Use

The following table and bar-chart exhibit quantities and relative contributions (%) from life cycle stages of 1m² Sonata and Sonata Healthcare to total Renewable primary energy as energy carrier (PERE), Renewable primary energy resources as material utilization (PERM), Total use of renewable primary energy resources (PERT), Non-renewable primary energy as energy carrier (PENRE), Non-renewable primary energy as material utilization (PENRM), Total use of non-renewable primary energy resources (PENRT), Use of secondary material (SM), Use of renewable secondary fuels (RSF), Use of non-renewable secondary fuels (NRSF), Use of net fresh water (FW) in resource use.

LCA Results: Resource Use			PRODUCT STAGE		
			A1	A2	A3
	Parameter	Unit	Raw material supply	Transport	Manufacturing
PERE	Renewable primary energy as energy carrier	[MJ, LHV]	1.18E+01	5.20E-01	2.28E-01
PERM	Renewable primary energy resources as material utilization	[MJ, LHV]	0.00E+00	0.00E+00	0.00E+00
PERT	Total use of renewable primary energy resources	[MJ, LHV]	1.18E+01	5.20E-01	2.28E-01
PENRE	Non-renewable primary energy as energy carrier	[MJ, LHV]	2.00E+02	3.43E+01	6.47E+01
PENRM	Non-renewable primary energy as material utilization	[MJ, LHV]	0.00E+00	0.00E+00	0.00E+00
PENRT	Total use of non-renewable primary energy resources	[MJ, LHV]	2.00E+02	3.43E+01	6.47E+01
SM	Use of secondary material	[MJ, LHV]	1.04E-01	0.00E+00	0.00E+00
RSF	Use of renewable secondary fuels	[MJ, LHV]	0.00E+00	0.00E+00	0.00E+00
NRSF	Use of non-renewable secondary fuels	[MJ, LHV]	0.00E+00	0.00E+00	0.00E+00
FW	Use of net fresh water	[m ³]	2.37E+03	1.15E+02	1.69E+02
Caption	PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy resources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water				



ENVIRONMENTAL PRODUCT DECLARATION

USG ME
Sonata and Sonata Healthcare Acoustical Ceiling Panels



According to ISO 14025


USG ME 1m² SONATA & SONATA HEALTHCARE LCA Results: Output Flows and Waste Categories

Table and bar-chart in the figure below exhibit quantities and relative contributions (%) from varying LCI stages of 1m² Sonata and Sonata Healthcare to total Hazardous waste disposed (HWD), Non-hazardous waste disposed (NHWD), Radioactive waste disposed (RWD), Components for re-use (CRU), Materials for recycling (MFR), Materials for energy recovery (MER), Exported energy (EE) in output flows and waste.

LCA Results: Output Flows and Waste Categories			PRODUCT STAGE		
			A1	A2	A3
Parameter		Unit	Raw material supply	Transport	Manufacturing
HWD	Hazardous waste disposed	[kg]	2.28E-07	6.03E-07	2.40E-09
NHWD	Non-hazardous waste disposed	[kg]	7.61E-01	8.21E-04	3.24E-03
RWD	Radioactive waste disposed	[kg]	4.55E-03	4.92E-05	8.55E-05
CRU	Components for re-use	[kg]	0.00E+00	0.00E+00	0.00E+00
MFR	Materials for recycling	[kg]	0.00E+00	0.00E+00	0.00E+00
MER	Materials for energy recovery	[kg]	0.00E+00	0.00E+00	0.00E+00
EE	Exported energy	[MJ, LHV]	0.00E+00	0.00E+00	0.00E+00
Caption	HWD = Hazardous waste disposed; NHWD = Non-hazardous waste disposed; RWD = Radioactive waste disposed; CRU = Components for re-use; MFR = Materials for recycling; MER = Materials for energy recovery; EE = Exported energy				



5. LCA: Interpretation

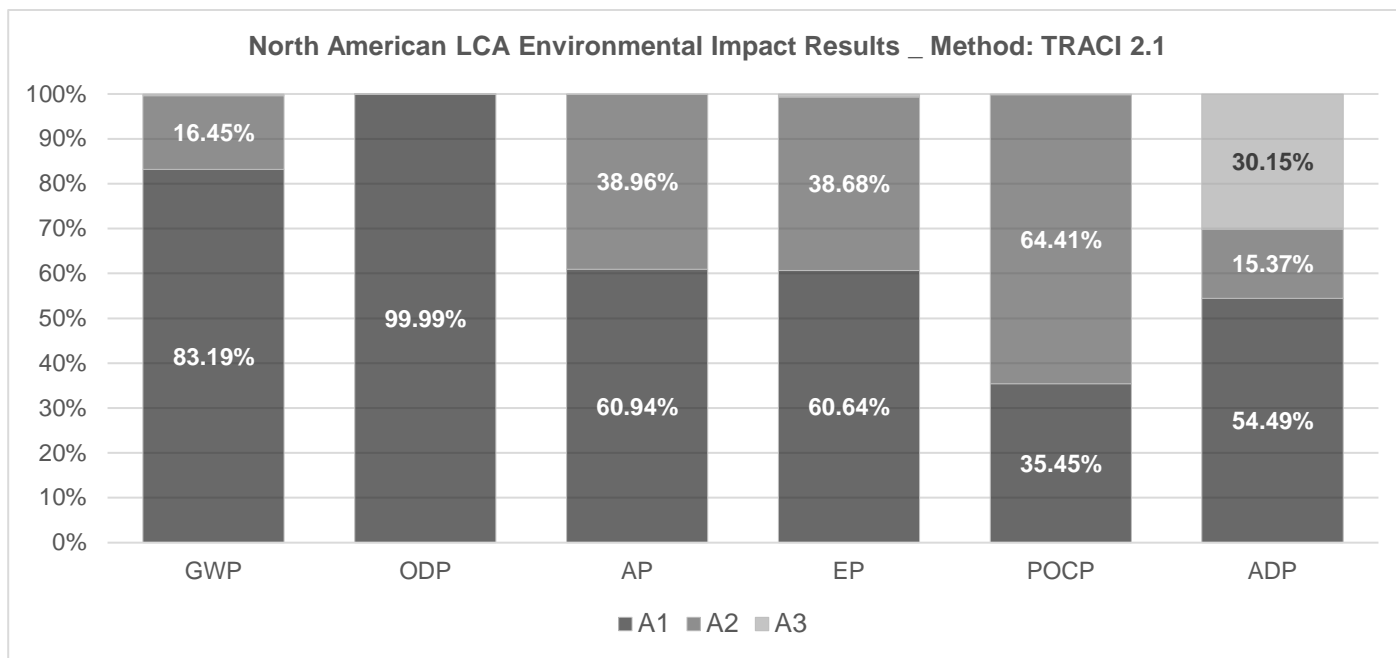


Analysis on relative contribution (%) from each impact category indicates that:

- A1 Module has a very high share in GWP with 83%, following that A2 Module has 16% share in GWP. In Module A1, 81% of GWP is caused by mineral wool. To reduce GWP, the amount of mineral wool may be reduced in case product quality is not affected. In addition, more sustainable transport strategies may be planned to reduce GWP.
- Almost all ODP is caused by Module A1. The majority of AP and EP are caused by Module A1 followed by Module A2. POCP is mostly caused by Module A2 and then by Module A1. Since these impacts are very low as against GWP, it is more logical to develop scenarios for decreasing GWP, and accordingly ODP, AP, EP, POCP will already have decreased by GWP scenarios.
- Module A1, Module A3 and Module A2 are the cause of ADP with 54.5%, 30% and 15.5%, respectively. In addition to the strategies that is suggested to reduce GWP, renewable energy sources may be preferred in production to reduce ADP in Module A3.

Sensitivity Analysis

When the LCA results are evaluated, it is determined that the suggested strategies to reduce GWP will already have reduced other impacts. For this reason, considering the fact that GWP is an impact category that should be evaluated as a priority, sensitivity analysis is conducted in order to reduce GWP. Mineral wool used as a raw material is the major source of GWP. Reducing mineral wool by 20% decreases the GWP of 1 m² of product by 13.5%.

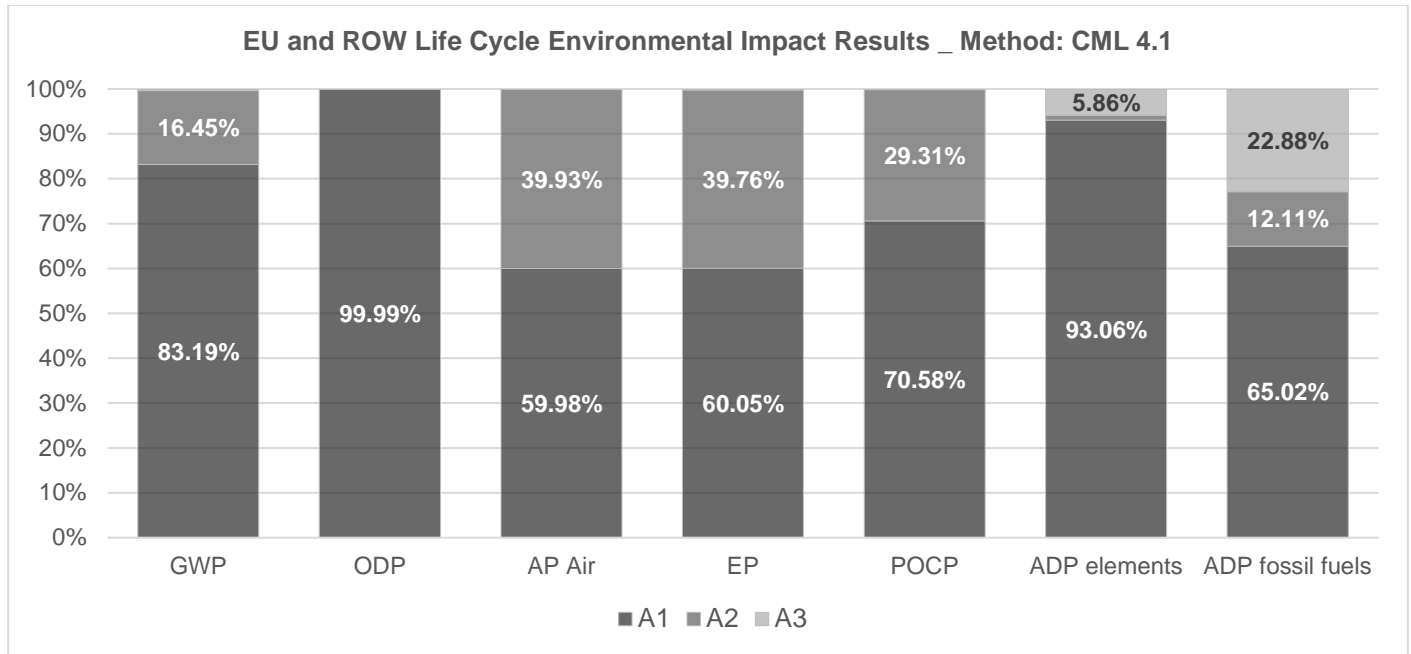

Analysis on relative contribution (%) from each impact category indicates that:

- A1 Module has a very high share in GWP with 83% ratio, following that A2 Module has 16% share in GWP. In Module A1, 81% of GWP is caused by mineral wool. To reduce GWP, the amount of mineral wool may be reduced in case product quality is not affected. In addition, more sustainable transport strategies may be planned to reduce GWP.
- Almost all ODP is caused by Module A1. The majority of AP Air, EP and POCP are caused by Module A1 followed by Module A2. Since these impacts are very low as against GWP, it is more logical to develop scenarios for decreasing GWP, and accordingly ODP, AP Air, EP, POCP will already have decreased by GWP scenarios.
- ADP elements are mostly caused by Module A1 with 93% and Module A3 with 6%. Besides, Module A1, Module A3 and Module A2 are the sources of ADP fossil fuels with 65%, 23% and 12%. In addition to the strategies that is suggested to reduce GWP, renewable energy sources may be preferred in production to reduce ADP elements and ADP fossil fuels in Module A3.

Sensitivity Analysis


When the LCA results are evaluated, it is determined that the suggested strategies to reduce GWP will already have reduced other impacts. For this reason, considering the fact that GWP is an impact category that should be evaluated as a priority, sensitivity analysis conducted in order to reduce GWP. Mineral wool used as a raw material is the major source of GWP. Reducing mineral wool by 20% decreases the GWP of 1 m² of product by 13.5%.

ENVIRONMENTAL PRODUCT DECLARATION

USG ME
Sonata and Sonata Healthcare Acoustical Ceiling Panels



According to ISO 14025

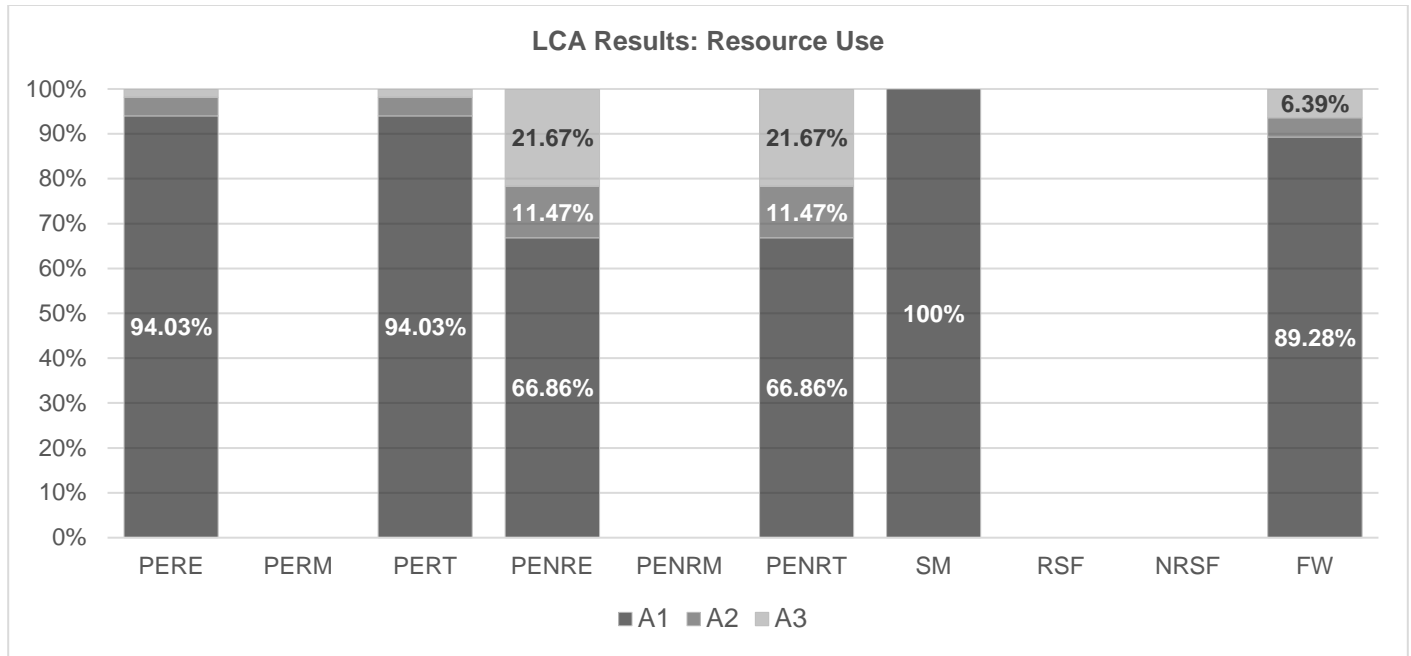

Analysis on relative contribution (%) from each impact category indicates that:

- Although PERE is consumed low as against PENRE, almost all PERE is consumed in Module A1. Besides, PENRE is consumed 67%, 22%, 11% in Module A1, Module A3, Module A2, respectively. Since PERM and PENRM are not consumed PERT and PENRT are identical to PERE and PENRE.
- The waste paper used as raw material which is considered under Module A1 is the only secondary material in the study.
- Module A1 has the highest share in FW with 89%, followed by Module A3 with 6%.




ENVIRONMENTAL PRODUCT DECLARATION

USG ME
Sonata and Sonata Healthcare Acoustical Ceiling Panels



According to ISO 14025

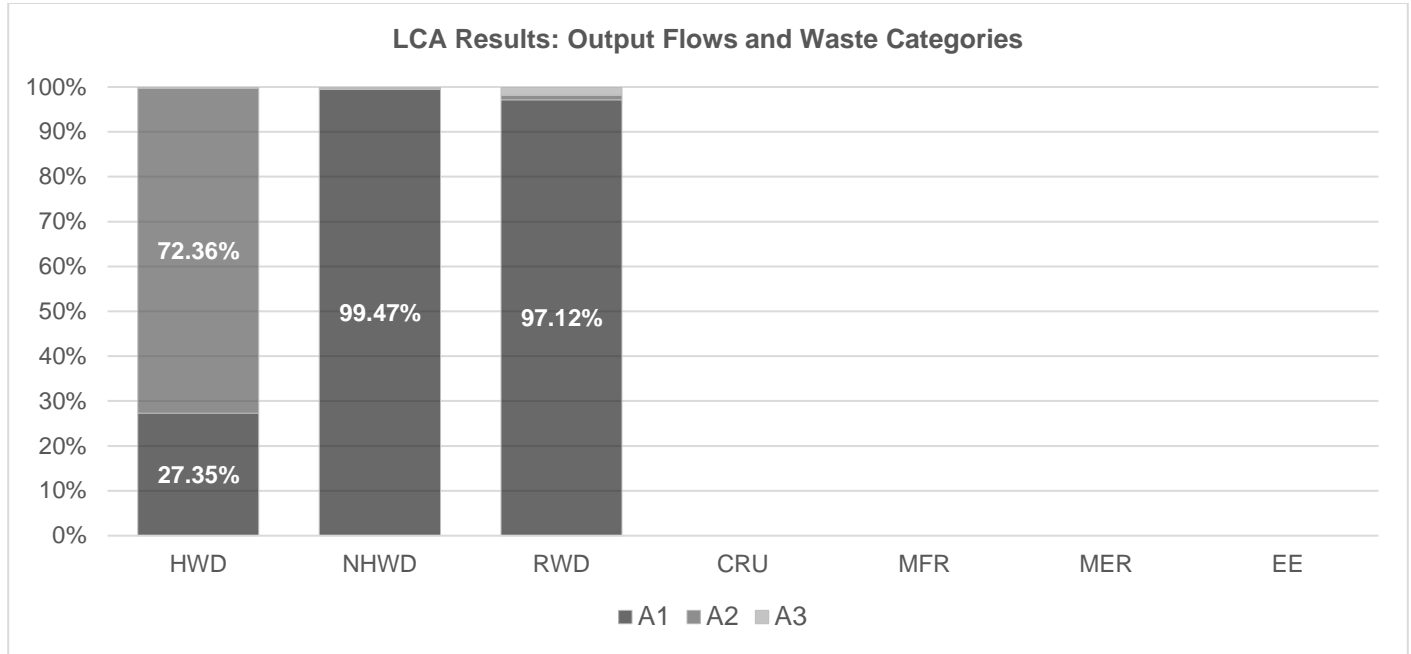

Analysis on relative contribution (%) from each impact category indicates that:

- Module A2 and Module A1 respectively cause 72% and 27% of HWD while almost all of NHWD and RWD are caused by Module A1.



6. References

LCA REPORT

LCA Report for Sonata and Sonata Healthcare, April 2020.

UL ENVIRONMENT

UL Environment General Program Instructions April 2015, version 2

PCR Part A: UL Environment and Institute of Construction and Environment e.V., Königswinter (pub.): Product Category Rules for Construction Products from the range of Environmental Product Declarations of Institut Bauen und Umwelt (IBU), Part A: Calculation Rules for the Life Cycle Assessment and Requirements on the Project Report. July 2014, version 1.3

UL Environment: PCR Guidance for Building-Related Products and Services; Part B: Non-Metal Ceiling Panel EPD Requirements; October 2015, version 1

SUSTAINABILITY REPORTING STANDARDS

EN ISO 14025:2011-10: Environmental labels and declarations: Type 3 Environmental Declarations Principles and Procedures.

EN 15804:2012-04+A1 2013 Sustainability of construction works: Environmental Product Declarations. Core Rules for the Product Category of Construction Products.

EN ISO 9001:2015 Quality Management System Requirements.

ISO 14001:2004 Environmental Management System Requirements Standard.

OHSAS 18001:2007 Occupational Health and Safety Management Systems Standard.

GaBi DB Version 6.115. Software and database for life cycle engineering.

CML 2001. Impact assessment developed by the Institute of Environmental Sciences, Leiden University, The Netherlands, and is published in a handbook with several different authors.

TRACI 2.1. Tool for the Reduction and Assessment of Chemical and other environmental Impacts 2.1.

ENVIRONMENTAL PRODUCT DECLARATION

USG ME
Sonata and Sonata Healthcare Acoustical Ceiling Panels



According to ISO 14025



Author of the Life Cycle Assessment

ERKE Sustainable Building Design LLC
Kisikli Mah. Hanimseti Sk. No:5
34692 Üsküdar/Istanbul TURKEY
Tel: +90 216 369 73 93
Fax: +90 216 369 73 96
Mail: info@erketasarim.com
Web: <http://www.erketasarim.com>



Owner of the Declaration

USG Middle East Ltd.
7410 (Wasil) Street #23, Cross 76 (Right) 2nd
Industrial City, Dammam 34326-420
KINGDOM OF SAUDI ARABIA
Tel: +966 13 812 0995
Fax: +966 13 812 1029
Mail: info@usgme.com
Web: <https://www.usgme.com>



Publisher

UL Environment LCC
2211 Newmarket Parkway Suite 106
Marietta, GA 30067 USA
Tel: +1 888 486 4733
Web: <http://www.environment@ul.com>

