


USG BORAL DRYWALL J-TRIMS

**PRODUCT CATEGORIES:
METAL J TRIMS**

Protect Drywall edges around door and window openings and provide a smooth trim line at intersections.


DIMENSIONS

Length: 3000 mm
 Dimensions: 13x14x25 mm or 13x17x25 mm
 Thickness: 0.45 mm
 Perforations: Standard

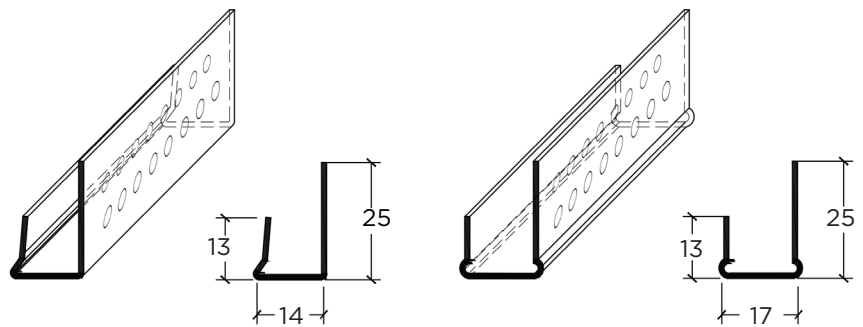

PERFORATIONS

Standard - 2 Patterns



RAW MATERIALS

- Galvanized steel G90

STEEL GRADE

Yield stress, Fy 33 ksi Ultimate

ASTM & CODE STANDARDS

- Metal J-trims are produced to meet or exceed ASTM C645 and C955.
- Galvanized sheet steel meets or exceeds requirements of ASTM A-653.
- For installation & storage information refer to ASTM C1007 & C754.

GREEN BENEFITS

LEED Credit MR 2 - USG Boral products are manufactured from coldformed steel. Steel is 100% recyclable, which helps divert debris from the waste stream.

LEED Credit MR 4 - USG Boral steel products have a minimum of 25.5% post-consumer recycled content, and 6.8% pre-consumer.