


USG Sheetrock® Brand Mold Tough® Panels Firecode® Type X

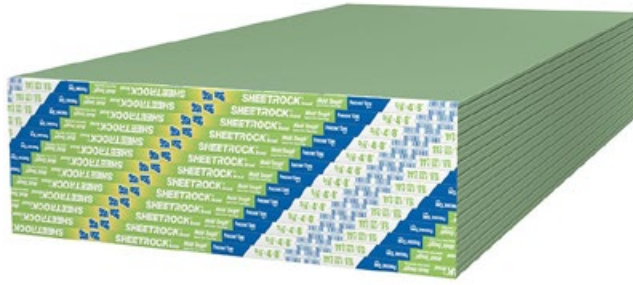

FEATURES & BENEFITS

15.9 mm Type X wallboard with moisture and mold resistance

- 15.9 mm Type X moisture- and mold-resistant panels for use on walls and ceilings
- Feature a noncombustible, moisture- and mold-resistant gypsum core encased in moisture- and mold-resistant, 100% recycled green face and brown back papers
- Comply with ASTM C1396, Standard Specification for Gypsum Board, for 15.9 mm Type X, waterresistant gypsum wallboard and exterior gypsum soffit board
- Underwriters Laboratories Inc. (UL) Classification as to fire resistance, surface-burning characteristics and noncombustibility
- Achieved GREENGUARD Gold Certification and qualifies as a low VOC emitting material (meets CA 01350)

DESCRIPTION

USG Sheetrock® Brand Mold Tough® Panels Firecode® Type X feature a noncombustible, moisture- and mold-resistant gypsum core that is encased in moisture- and mold-resistant, 100% recycled green face and brown back papers. When tested in accordance with ASTM D3273, Standard Test Method for Resistance to Growth of Mold on the Surface of Interior Coatings in an Environmental Chamber, the panels meet or exceed ASTM C1396 specifications. The long edges of the panels are tapered, allowing joints to be reinforced and concealed with USG Sheetrock® Brand joint treatment systems. The panels are UL Classified for fire resistance and can be used in any UL Design in which Type SCX panels are listed. On the face along the long edge of each panel, the UL Type Designation is printed for easy identification by building inspectors.

INTENDED FOR

- Commercial or residential applications where 15.9 mm moisture- and mold-resistant Type X panels are required
- Areas where additional moisture and mold resistance is desired
- New or repair and remodel construction
- Interior tile substrate in dry locations or areas with limited water exposure
- Protected exterior soffit and ceiling applications

LIMITATIONS

1. Avoid exposure to sustained temperatures exceeding 50 °C.
2. Avoid exposure to excessive, repetitive or continuous moisture before, during and after installation. Eliminate sources of moisture immediately.
3. Must be stored off the ground and under cover in accordance with Gypsum Association’s Handling and Storage of Gypsum Panel Products (GA-801).
4. Not suitable for use as a substrate for tile in wet areas such as tubs and showers, gang showers and other areas subject to direct water exposure.
5. Use as a tile substrate is limited to tile installed according to the most current TCNA and ANSI specifications. Please consult with the adhesive and tile manufacturers for their recommendations for maximum size and weight parameters for use with gypsum board.
6. Not recommended for exterior soffits and ceilings which project upwards and away from the building proper.

INTERIOR INSTALLATION, FINISHING AND DECORATING INSTALLATION

USG Sheetrock® Brand Mold Tough® Panels Firecode® Type X install and finish just like standard 15.9 mm

Maximum Frame Spacing Drywall Construction

Direct Application	Panel Thickness	Location	Application Method ¹	Maximum Frame Spacing OC
Single-layer	15.9 mm	Ceilings	Perpendicular	610 mm
		Sidewalls	Parallel or perpendicular	610 mm
Double-layer	15.9 mm	Ceilings	Parallel or perpendicular	610 mm
		Sidewalls	Perpendicular	610 mm

Notes:

1. Long edge position relative to framing.
2. Maximum 406 mm OC if fire rating required.

FINISHING AND DECORATING

For high-quality finishing results, USG recommends USG Sheetrock® Brand finishing products.

Painting products and systems should be used that comply with recommendations and requirements in Appendices of ASTM C840. For priming and decorating with paint, texture or wall covering, follow manufacturer’s directions for materials used. Gypsum Association’s Recommended Specification for Levels of Gypsum Board Finish (GA-214) should be referred to in order to determine the level of finishing needed to ensure a surface properly prepared to accept the final decoration.

All surfaces, including applied joint compound, must be thoroughly dry, dust-free and not glossy. Prime with Sheetrock® Tuff-Hide™ primer-Surfacer or with an undiluted, interior latex flat paint with high-solids content. Allow to dry before decorating.

To improve fastener concealment where gypsum panel walls and ceilings will be subjected to critical artificial or natural side lighting, or will be decorated with a gloss paint (eggshell, semi gloss or gloss), the gypsum panel should be skim coated with joint compound. This equalizes suction and texture differences between the drywall face paper and the finished joint compound before painting. When a Level 5 finish is required, use USG Sheetrock® Brand Tuff-Hide™ Primer-Surfacer.

EXTERIOR INSTALLATION, FINISHING AND DECORATING WOOD FRAMING

25.4 x 101.5 mm wood furring may be used in non-fire-rated construction for screw application where support member spacing is 610 mm OC maximum. Furring of 50.8 mm nominal thickness should be used in non-fire-rated construction for nail application of board or where framing spacing is from 610 mm to 1220 mm OC maximum.

STEEL FRAMING

Installation of grillage should be the same as for single-layer drywall application.

WEATHER PROTECTION

At the perimeter and vertical penetrations, the exposed core of panels must be covered with a J-stop trim or securely fastened moldings. In areas subject to freezing temperatures and other severe weather conditions, shingled roofs should be installed in accordance with good roofing practices. Fascia boards should extend at least 6.5 mm below the ceiling board or adjacent trim moldings, whichever is lower, to provide a drip edge.

INTERSECTIONS

Where ceiling board expanse exceeds 1220 mm a space of at least 6.5 mm should be provided between edge of ceiling board and adjacent walls, beams, columns and fascia. This space may be screened or covered with molding but should not be caulked.

CONTROL JOINTS

USG Sheetrock® Brand Mold Tough® Panels Firecode® Type X like other building materials, are subject to structural movement, expansion and contraction due to changes in temperature and humidity.

FINISHING AND DECORATING

Treat joints with USG Sheetrock® Brand Durabond® and USG Sheetrock® Brand Fiberglass Joint Tape. These setting-type joint compounds are hardening-type products developed to provide faster finishing of drywall, even under slow drying conditions.

Rapid gypsum setting and low shrinkage permit same-day finishing and usually next-day decoration. They also feature exceptional bond; virtually unaffected by humidity extremes.

PRODUCT DATA

	UL Type SCX
Thickness	15.9 mm
Lengths ³	2440 - 3660 mm
Width	1220 mm
Weight ⁴ , nominal	10.7 kg/m ²
Edges	Tapered
Packaging	Two panels per bundle

Notes:

- 3. Other sizes available by special order. Check with your local USG representative for availability.
- 4. Represents approximate weight for design and shipping purposes.

MOISTURE AND MOLD RESISTANCE

Per ASTM C473, the average water absorption for USG Sheetrock® Brand Mold Tough® Panels Firecode® Type X is not greater than 5% by weight after two-hour immersion.

In independent lab tests conducted on USG Sheetrock® Brand EcoSmart Panels Mold Tough® Firecode® X at the time of manufacture per ASTM D3273, Standard Test Method for Resistance to Growth of Mold on the Surface of Interior Coatings in an Environmental Chamber, the panels meet or exceed ASTM C1396 specifications.

This ASTM lab test may not accurately represent the mold performance of building materials in actual use. Given unsuitable project conditions during storage, installation or after completion, any building material can be overwhelmed by mold. To manage the growth of mold, the best and most cost-effective strategy is to protect building products from water exposure during storage and installation and after completion of the building. This can be accomplished by using good design and construction practices.

COMPLIANCE

- Comply with ASTM C1396 for 15.9 mm Type X, water-resistant gypsum wallboard and exterior gypsum soffit board
- Classified as a Class A Interior Finish Material per Section 803.1 of the International Building Code® (IBC®)
- UL Classification as to fire resistance, surface-burning characteristics and core combustibility
- Achieved GREENGUARD Gold Certification and qualifies as a low VOC emitting material (meets CA 01350)